




TDP
TUBE 6146B / QE05/40

GENERAL DESCRIPTION

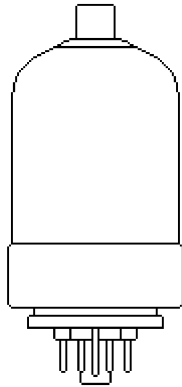

The 6146B / QE05/40 is a small, lightweight beam-power pentode designed for service as a very high frequency amplifier. It has a short sturdy structure and is ideal for mobile and compact stationary equipment. Due to its superior design, the 6146B / QE05/40 has high power sensitivity, high perveance, and low driving power requirements. The heater-cathode structure of the 6146B / QE05/40 is designed to supply ample tube current with heater voltages from 6.0 to 7.5 volts; however the tube will perform satisfactory with heater voltages ranging from 5 to 8 volts. Satisfactory operation throughout a wide range of supply voltages makes possible reliable performance under the conditions normally encountered in mobile service.

Adequate shielding and effective RF grounding are facilitated by the cathode, grid 3, and internal shield all of which are connected to 3 base pins. Isolation of output from input is further enhanced by a top-cap plate connection.

TECHNICAL SPECIFICATIONS

ELECTRICAL

Cathode	Coated Unipotential
Heater	
Voltage	6.3 volts
Current	1.25 ampere
Minimum Preheat Period	6 minutes
Amplification Factor	4.5
Interelectrode Capacitances	

Grid 1 to Plate	0.22 Max. pf
Grid 1 to All Except Plate	13 pf
Plate to All Except Grid 1	8.5 pf
Transconductance	7000 mhos

MECHANICAL

Base	E.I.A. Group 1, B8-150 or B8-159
Cap	JEDEC C1-1
Maximum Overall Dimensions	
Length	4.0625 inches
Diameter	1.6250 inches
Mounting Position	Any
Cooling	Radiation and Convection
Maximum Bulb Temperature	260° C
Net Weight	2.3 ounces

Specifications may change without notice

THIS TUBE IS USED IN THE FOLLOWING SHORTWAVE BROADCAST TRANSMITTERS

Manufacturer	Transmitter specifications	Power in kW
Continental Electronics	417 B	50
	HF-1 M	1
	HF-20 / HF-20 B	20
Gates	HF-50 C	50
	HF-100 C	100
	HF-100	100
RCA	BHF-1A	1
	BHF-10A	10

THIS TUBE IS AVAILABLE FROM

Manufacturer	Rebuilder	Distributor
Penta Laboratories		Richardson Electronics Thomas J. Bruckner Vacuum Tubes, Inc.

PRICE LEVEL (US\$)

1	2	3	4	5	6
0 - 10	10 - 100	100 - 1000	1000 - 10,000	10,000 - 50,000	50,000 - 100,000

2 3 4 5 6 8 BY C F ML Q RS TH YL

For more information, contact

TDP	Tel : +32 33 14 78 00
c/o Ludo Maes	Mob : +32 477 477 800
P.O. Box 1	Fax : +32 33 14 12 12
2310 Rijkevorsel	E-mail : info@transmitter.org
BELGIUM	Web : http://www.broadcast.be

Home
Stations

Airtime
TDP

Antennas
TDPradio

DRM Airtime
Transmitters

DRM Stereo
Tubes