


The Tube Directory

INDEX

[6C33C](#)[6C41C](#)[6C19C](#)[300B](#)[VV30B](#)[2A3](#)[KT66](#)[KT77](#)[KT88](#)[EL34](#)[6L6
5881](#)[6550](#)[807](#)[5998](#)[8417](#)[12AX7
ECC83](#)[12AT7
ECC81](#)[12AU7
ECC82](#)[6189](#)

The 6C33C

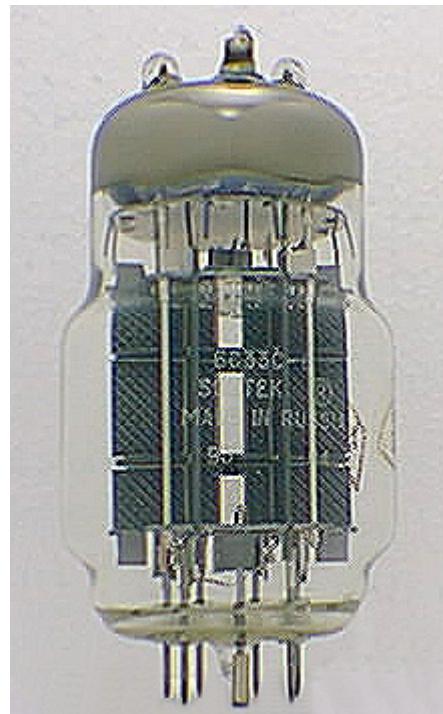

[Specification and max ratings^{\(*\)}](#)

Filament Voltage 2 x 6.3 V

Filament Current 2 x 3.3 A

Plate Voltage (max) 400 V


Plate Current (max) 600 mA

Plate Dissipation (max) 60 W

Screen Voltage (max) --- V

Screen Current (max) --- A

Screen Dissipation (max) --- W

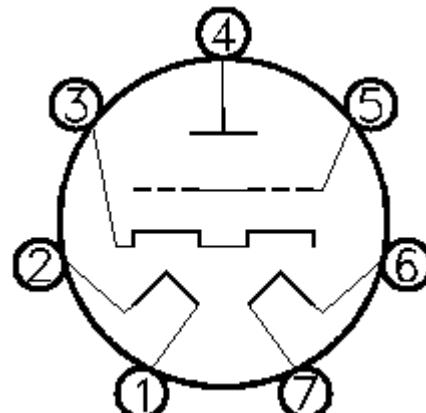

^(*) These specifications are provided 'as-is', with no warranty of any kind. Use of these parameters shall be entirely at the user's own risk.

