

The Tube Directory

INDEX

6C33C

6C41C

6C19C

300B

VW30B

2A3

KT66

KT77

KT88

EL34

6L6

5881

6550

807

5998

8417

12AX7

ECC83

12AT7

ECC81

12AU7

ECC82


6189

The 807



Specification and max ratings(*)


Filament Voltage	6.3 V
Filament Current	0.9 A
Plate Voltage (<i>max</i>)	400 V
Plate Current (<i>max</i>)	125 mA
Plate Dissipation (<i>max</i>)	25 W
Screen Voltage (<i>max</i>)	400 V
Screen Current (<i>max</i>)	--- A
Screen Dissipation (<i>max</i>)	--- W

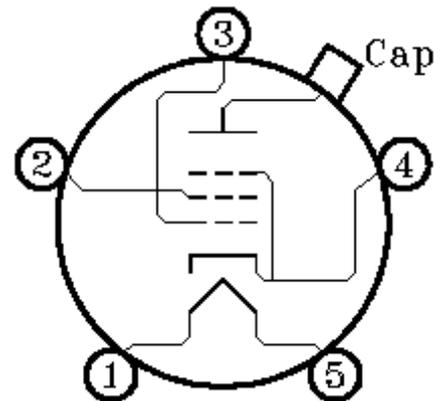


(*) These specifications are provided 'as-is', with no warranty of any kind. Use of these parameters shall be entirely at the user's own risk.

807 triode mode connection

6680
6DJ8
ECC88
6922
6SL7
6SN7
5U4
SOFIA
HOME PAGE
MAIL US !

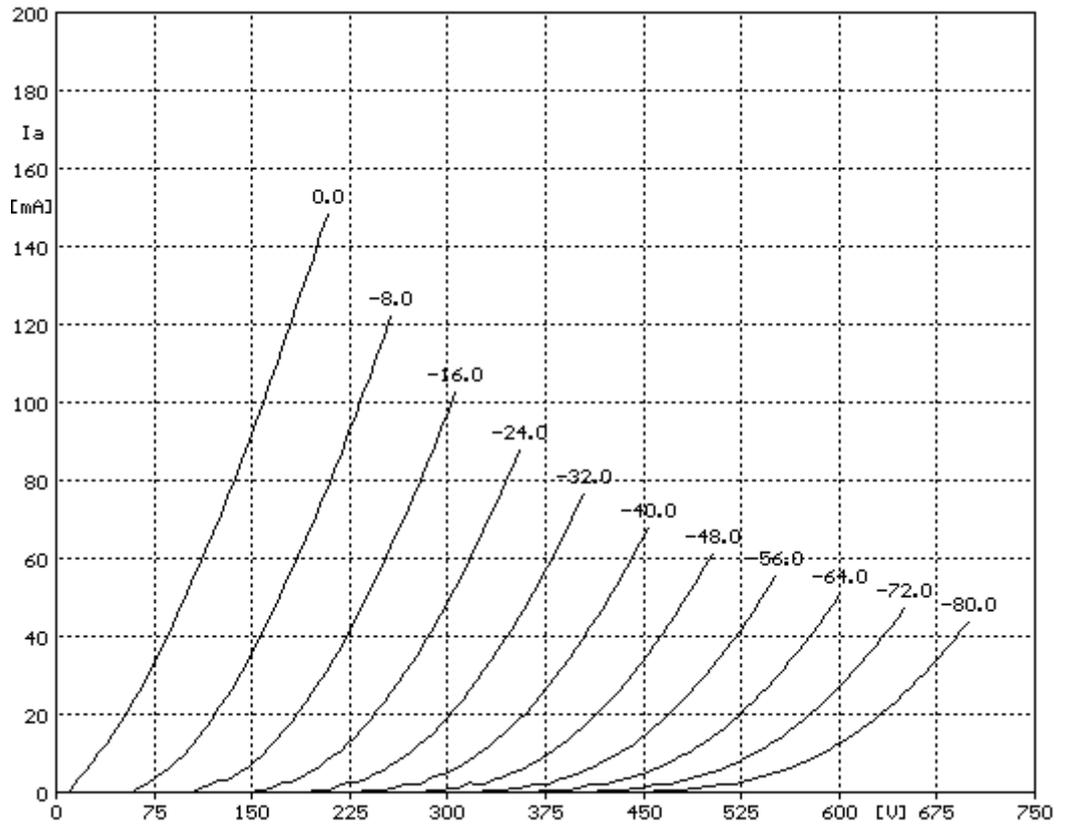

807 ultralinear mode connection

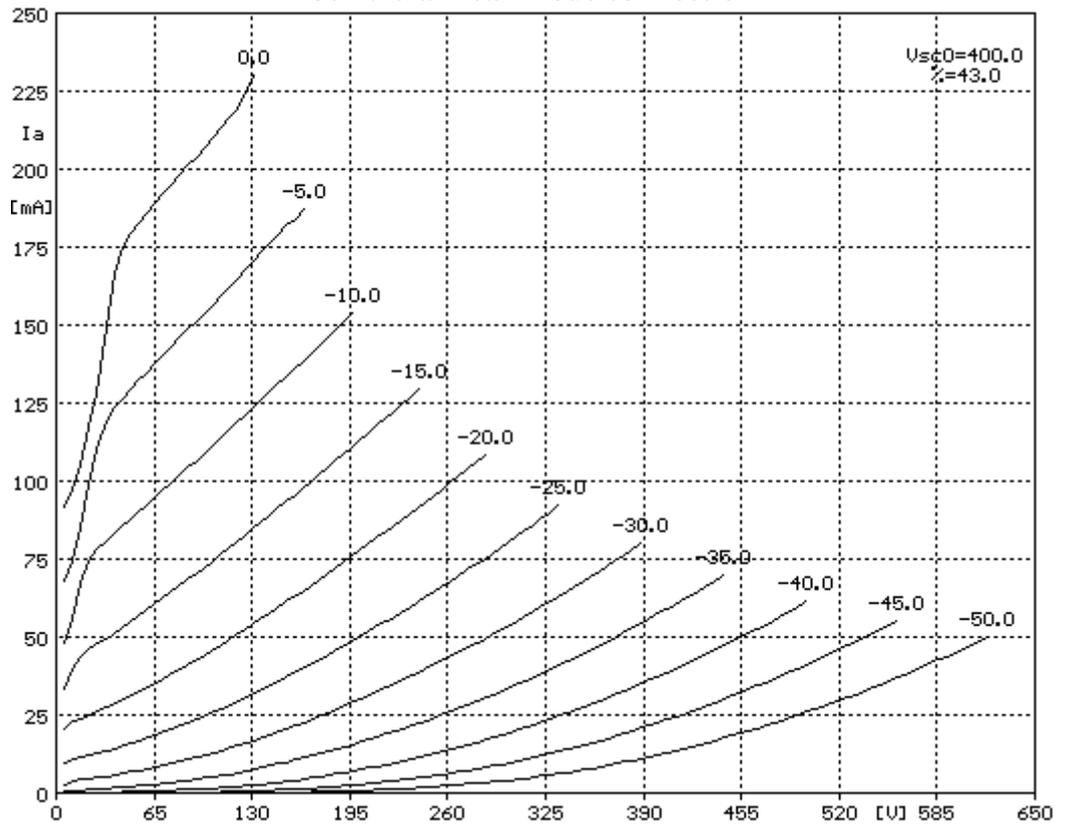

807 pentode mode connection

