


**Menu**

[Home](#)  
[Tube data](#)  
[Schematics](#)  
[Software](#)  
 Search engines

**Information**

[Help](#)  
[Forum](#)  
[Terms of use](#)  
[News](#)  
[Statistics](#)  
[Credits](#)

## 6JS6 Pinout

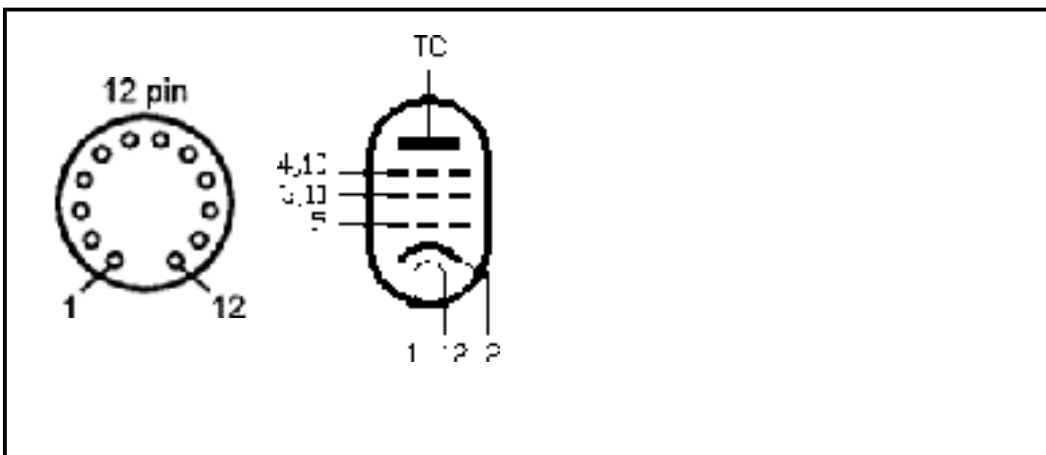

## 6JS6 Substitutes

Different rating or performance [6JS6A](#), [6JS6B](#), [6JS6C](#)

Different filament voltage [12JS6](#), [21JS6A](#), [23JS6A](#), [31JS6A](#), [31JS6C](#)

Warning: Substitutes are given as a guide only - please refer to original manufacturers data sheets to ensure that a substitute is safe and appropriate for your application.

## 6JS6 Ratings

Vh	Ih	VaPeak	VaMax	Vg2Max	PaMax	Pg2Max	IkMax	Cgk	Cak	Cga
6.3	2.25	7,500	990	190	28.0	5.5	315	24.0	10.0	0.7

## 6JS6 Application Data

Class	Va	Vg2	Vg1	Ia	Ig2	Ra	S
Line output	175	125	-25.0	125.0	4.5	5,600	11.3
Line output	70	120	0.0	570.0	34.0		

## 6JS6 Data sheet links

[Duncan's Amp Pages](#) **12JS6**: [Acrobat PDF](#)  
[N7JP Tube Database](#) **6JS6**: [HTML page](#)

All content on this page is copyright 1997-2006 Duncan Amplification.  
 Please report any issues with the site through [the forum](#).

Version: PHP release 1.06