
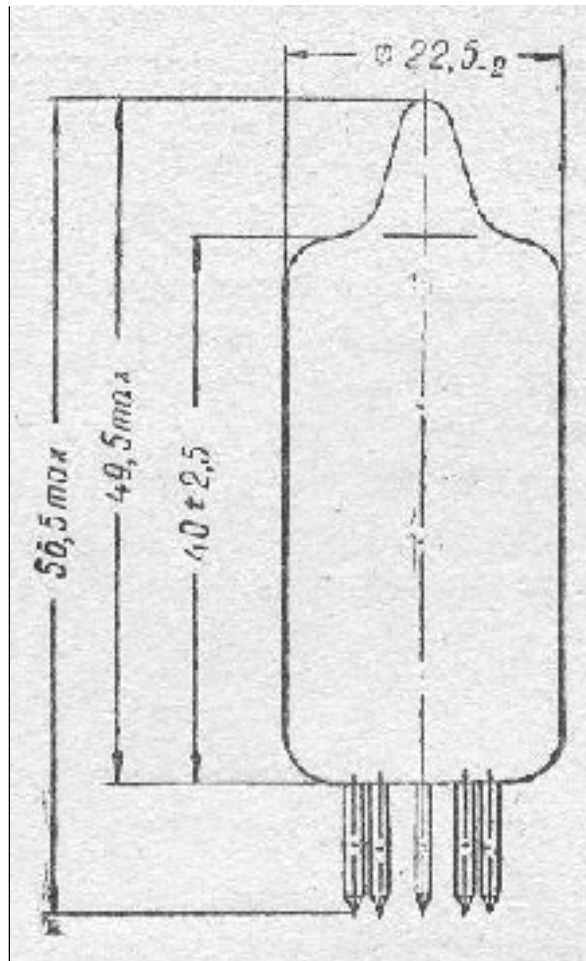


[Russian Tubes LLC](#)[about company](#) | [tubes info](#) | [delivery](#) | [warranty](#) | [payment](#) | [sale](#) | [links](#) | [e-mail](#)**6Zh50P**

Name	6Zh50P
Type	HF pentode
Application	Application in first stages of wide-band amplifiers
Cathode type	oxide,indirect heating
Envelope	glass,miniature
Mass,g	15
Filament voltage,V	6,3
Filament current,A	0,275-0,325
Anode voltage,V	150
Anode current,A	0,015-0,035
Anode power,W	5,3
Grid2 voltage,V	150
Grid3 voltage,V	0
Steepness,mA/V	25,0-45,0
Reverse grid current,uA	0,3
Microphnic noise,mV	100
Socket type	rsh8

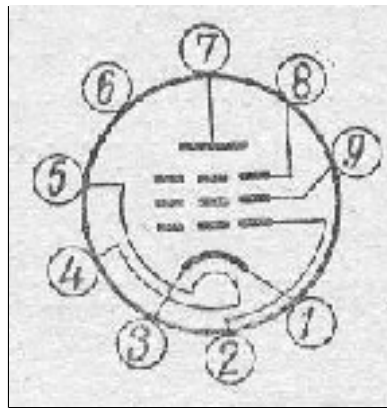

[about company](#) | [tubes info](#) | [delivery](#) | [warranty](#) | [payment](#) | [sale](#) | [links](#) | [e-mail](#)

© Copyright **Russian Tubes LLC**, 2002

Created by **VVS**